


SPOT LIGHT SOURCES

LIGHTNINGCURE[®] SERIES

Lamp warranty: Guarantees a long operating life of 4000 hours

LC8

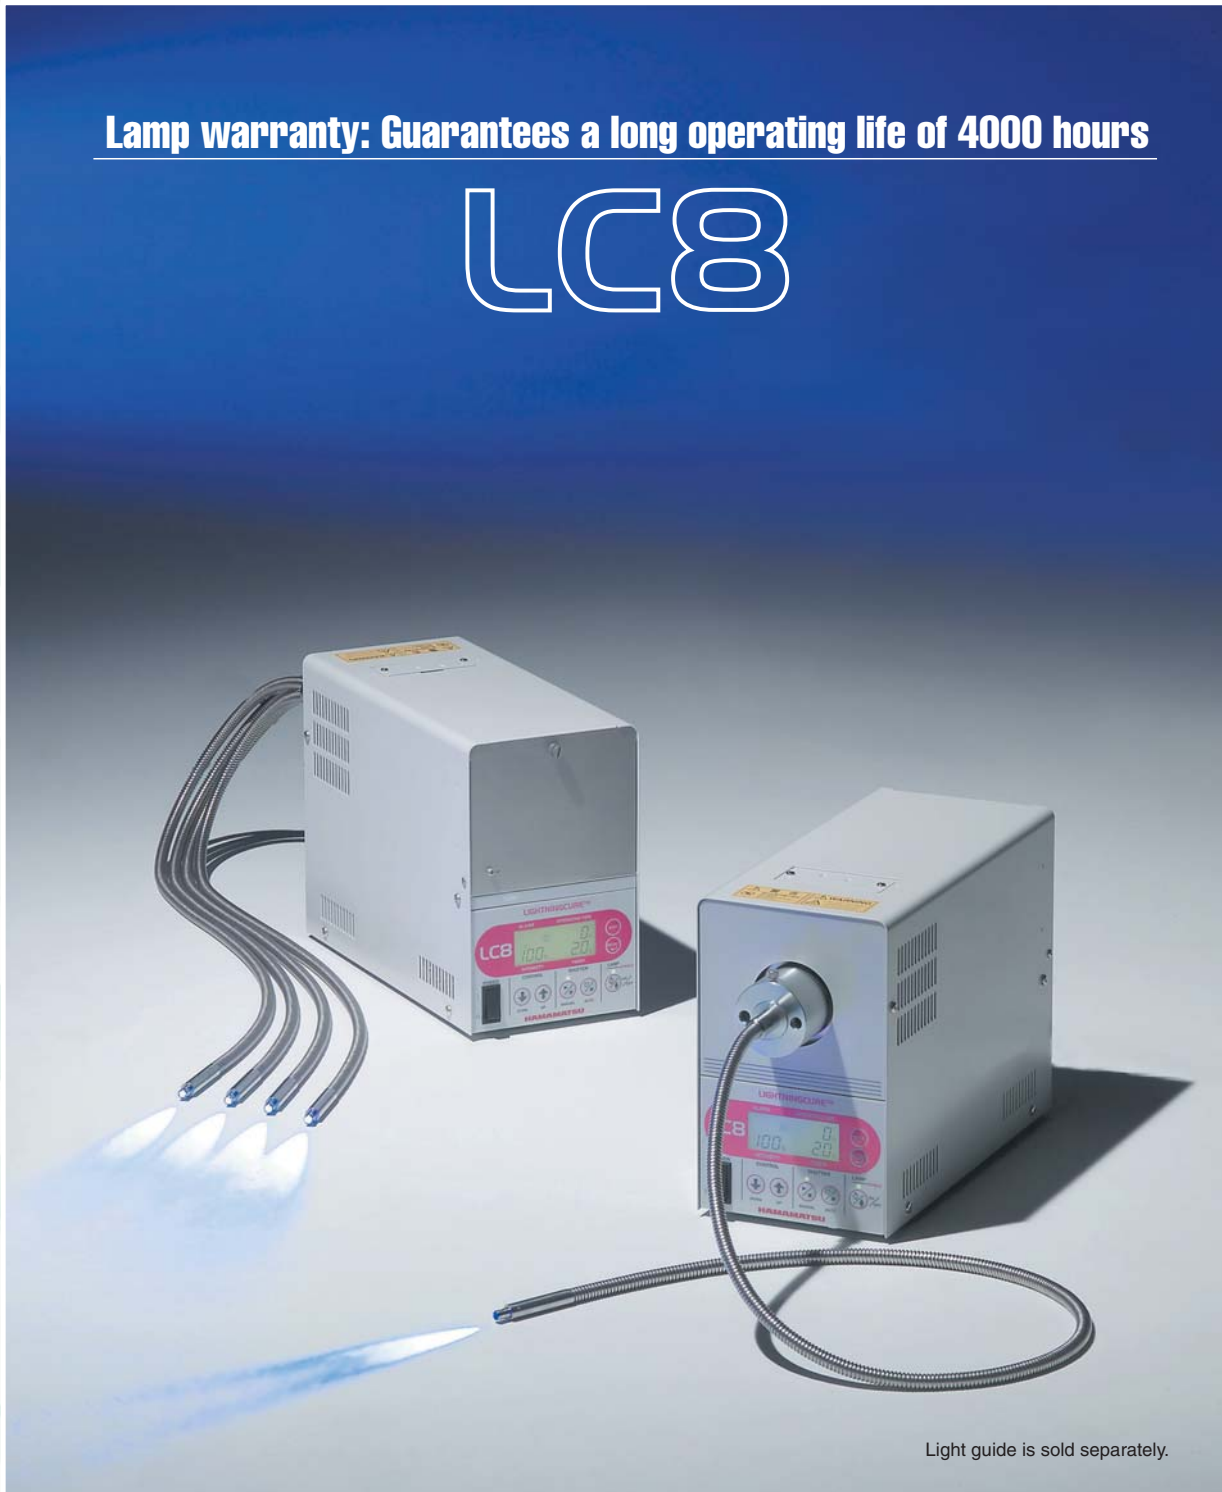

Light guide is sold separately.

HAMAMATSU
PHOTON IS OUR BUSINESS

1 Operate it from your PC via the RS-232C port.



This unit has a built-in RS-232C port to allow PC or micro-computer control that was impossible up until now. Making program entries (irradiance, irradiation time) for the Memory Step is now accurate and easy. You can operate the light source even in a location where direct access to it is impossible.


Using the USB adaptor connector lets you use a PC even if it has no RS-232C port. We also offer sample software that displays easy-to-use setup screens, etc.



Memory Step setting dialogue

Light source control dialogue

When PC starts communication

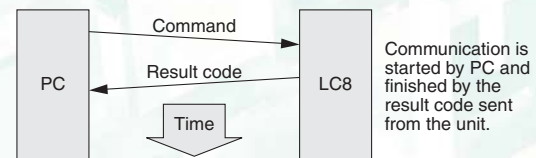

Communication is started by PC and finished by the result code sent from the unit.

2 Irradiance monitor with internal optical feedback function



(Option: Sold separately)

This unit maintains the irradiance at a fixed level for stable irradiation. Irradiance usually varies over time during lamp operation. Our light source, however, can constantly maintain the preset irradiance since it regulates irradiance while monitoring it with an internal sensor.

This spot light source also has internal light feedback and so does not need a dedicated feedback light guide used in conventional products.

The irradiance (reference value) is displayed as a digital value (in watts) on the LCD display. This eliminates problems that occur due to human error and different operating conditions. Full control even of detailed settings makes it ideal for fully automated production lines.



Display screen showing W (watts units)

Feature Memory Step™ for 9 types 7-step programs




Program the irradiance and irradiation time to any level you want! Freely set the UV irradiation conditions to match the component you want to bond.


The LIGHTNINGCURE LC8 lets you store 9 types of 7-step programs in the memory, so optimal irradiation conditions matching the component for bonding can be set just by changing the program number. This holds true even when multiple bonding components are flowing in the same production process or when shifting to different production lines.

The LC8 is especially ideal for components that must be fixed in place with high precision. The mounting positions of these components often deviate due to stress warping and contraction in the adhesive that causes positional shifts. Using the LC8 gives better production stability and higher product yield especially for components demanding high position precision.


Program example 1: Increasing light irradiance in 7 steps

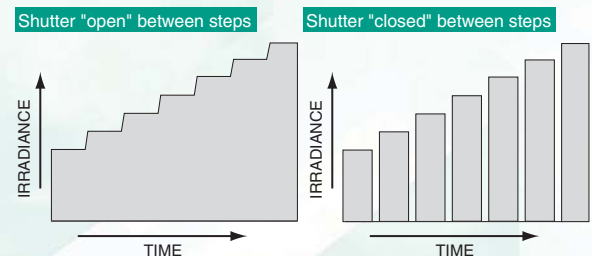

Program example 2: Random irradiance and irradiation time settings

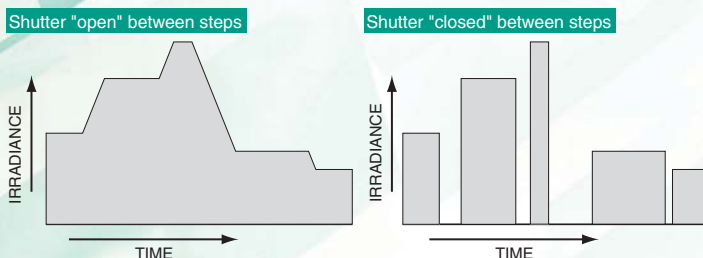

Program example 3: Low irradiance and then long-term high intensity

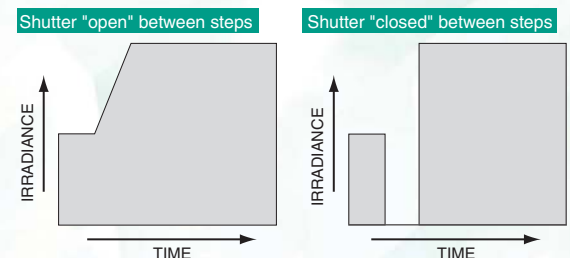

LIGHTNINGCURE LC8


FEATURES & FUNCTIONS

Long life

Guaranteed life: 4000 h (-01A type and -02A type)

Irradiance generally declines with lamp operating time. Hamamatsu has drastically improved these drops in irradiance by using a mercury-xenon lamp whose electrodes suffer almost no wear and an improved optical system.

●Variations in UV irradiance [365 nm] over time (typical values)

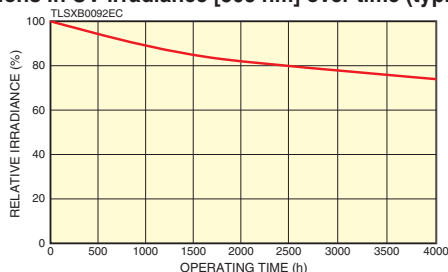

Anybody can use it! One-touch replacement!

Lamp is replaceable in less than 30 seconds!

Just insert the lamp to replace it. No wiring to worry about. This is so easy you can do it with one hand.

Lamp is the cassette type with a preset optical axis so no troublesome optical alignment is needed after replacement.



Full line-up of external control equipment

(RS-232C and D-sub connector: standard feature, terminal block: option E9795-01 [sold separately])


You can turn the lamp on and off and control the shutter externally. An alarm signal output is also available. Signals and data can be exchanged with the PC via the RS-232C. This unit will prove ideal for production environments such as semi-automated or fully automated manufacturing lines.



Upper: D-SUB connector
Under: RS-232C

Clever layout allows a compact body

Superb features are concentrated into a compact body. Weight has been reduced to a mere 6.4 kg. Area of installation can be reduced. Stacking the units allows saving even more space.



Great energy saving benefits

Our 200 W lamps have high output equal to lamps in the 250 W class. Light sources using our 200 W lamps also have less power consumption than those using 250 W lamps. Power consumption is the lowest in its class (280 VA Typ.). This means using multiple UV light source units at production facilities will yield tremendous energy saving benefits.

Instantaneous power-outage response program

Restores operation in about 10 seconds after power outages of a second or less. Conventional products take at least a few minutes to start up again after a power shutdown, so you can see this function drastically shrinks down-time due to power outages. This function is especially convenient in places where the supply of power is intermittent or unstable.

Power supply compatible in world-wide

Internal power supply automatically switches to a 100 V or 200 V input. There is no problem when shifting the operating location in world-wide.

**WORLD-WIDE
OPERATION**

CE marking compliance

The LIGHTNINGCURE complies with CE marking requirements and can also be used in Europe.

Meets the following standards

· Safety standards: IEC61010-1:2010 · EMC standards: IEC61326-1:2006 Group 1 Class A

Selectable positions of light guide port

A front port type and a rear port type are available. The front port type allows lamp replacement from the operation panel side. This helps hold limits on equipment movement and installation location to a minimum. Select the light guide port position that best matches the component for bonding and its mounting position.




Left: Rear light guide port type L9566, Right: Front light guide port type L9588

Irradiance adjustable anywhere within 0 to 100 %!

An electric diaphragm mechanism allows a digital display of the relative irradiance from 0 % to 100 % on the LCD panel. Unlike conventional analog scales, this means highly precise irradiation. Irradiance also can be controlled from an external device, so meeting various kinds of measurement conditions is now even easier.


Irradiance vs. panel display

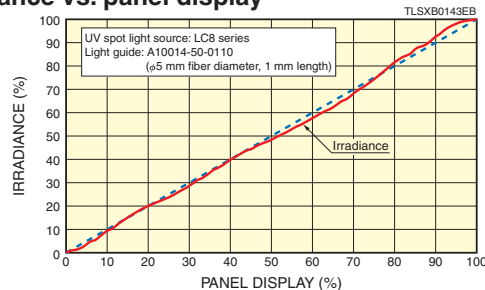

STRUCTURE

Easy filter replacement

Eight types of filters are provided for selecting the irradiation light. A single screwdriver is all you need to replace the filter via the upper filter insertion port. There is no need to open any cover as on conventional units, so you save even more replacement time.

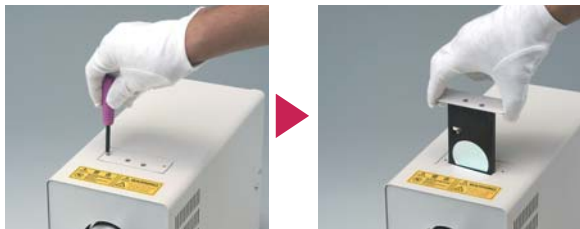


Filters and filter holder are sold separately.

High efficiency optical system - no heat problems

The LC8 combines a mercury-xenon lamp having high output UV line spectra with an elliptical reflector having reflectivity higher than 90% in the UV range and a quartz light guide with excellent UV transmittance.

The lamp can be operated in a horizontal position, so the optical system has less light loss compared to lamps operated in an upright position, allowing the UV light to input efficiently to the light guide. The elliptical reflector efficiently reflects only the UV light, and lets heat rays and visible light pass through to prevent adverse effects from heat on the irradiated point (-01A type and -02A type).

●Structural View

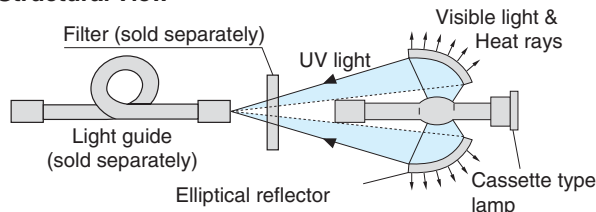

TLSXC0040EC

No optical axis alignment

Uses a highly stable mercury-xenon lamp developed expressly for analysis and measurement applications. There is almost no wear on the electrodes and no positional shift of the arc point. Absolutely no optical axis alignment is needed, even during lamp replacement or during lamp use.

●Electrode wear



Before use



After 4000 hours of use


CHARACTERISTICS

Selectable wavelength


The LC8 allows you to select the wavelength range you need. The lineup includes the model "-01A" with a center wavelength of 365 nm, "-02A" enhanced for 250 nm wavelength band, "-03" designed for the visible light range, and "-04" of total reflection type, and "-06" with a wide band around 365 nm. Select the light source that matches your applications.

If you need special specifications, please feel free to consult us.

●UV spectral distribution (-01A type, -02A type and -06A type)

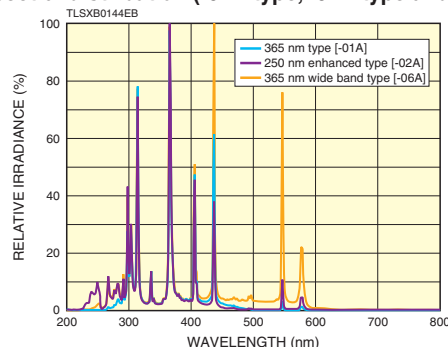

●Visible light spectral distribution (-03 type and -04 type)

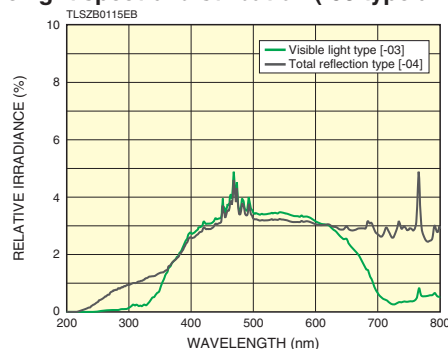


Visible light and the infrared rays can be cut, and it can combine with the filter etc. that suppress the heat influence on the irradiation part to the minimum (see "ACCESSORY" section).

High output

UV irradiance: 4500 mW/cm² (-01A type, at 365 nm)

The LC8 yields an extremely strong spectral distribution in the UV range most effective for UV curing. UV irradiance distribution is dependent on the distance from the light guide output end to the target surface to be irradiated, as well as on the type of light guide used. The greater the distance from the light guide output end to the target surface, the more the maximum UV irradiance drops and the more the light beam expands (see below).

●UV irradiation distribution

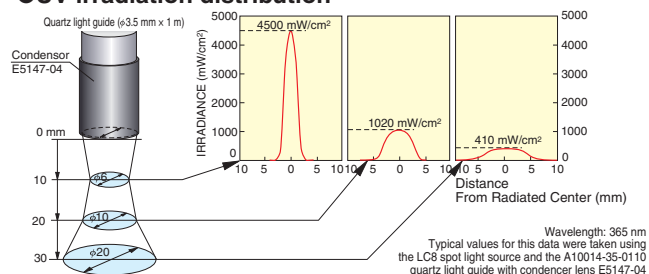

TLSXB0145EC

CONTROL

Control	Front panel control	Communication connector (RS-232C)	External control terminal (D-SUB connector) *1
Main power ON/OFF	○	—	—
Lamp ON/OFF	○	○	○
Shutter drive	Open/Close	○	○
	Auto open/Close by timer *2	○	○
	Auto shutter time setting	○	—
Irradiation program (Memory Step™) setting	○	○	—
Optical power adjustment (UP/DOWN)	○	○	○
Lamp ON indicator	○	○ (Signal output)	○ (Signal output)
Lamp stability indicator	○	○ (Signal output)	○ (Signal output)
Shutter open indicator	○	○ (Signal output)	○ (Signal output)
Lamp operation hour meter	○	○	—
Overheat alarm	○	○ (Signal output)	○ (Signal output)
Lamp operation time alarm	○	○ (Signal output)	○ (Signal output)
Operating switch for power saving mode *3	—	—	—

*1 10P terminal block is available as option E9795-01 (sold separately).

○ : available, — : not available

*2 Corresponds to "start/stop" of Memory Step™.

*3 The operating switch is inside

SELECTION GUIDE

Type No.	Spectral distribution ①	Lamp for maintenance ②	Guaranteed life
L9566-01A / L9588-01A	[365 nm type] 300 nm to 450 nm	L10852	4000 h (at 365 nm)
L9566-02A / L9588-02A	[250 nm band enhanced type] 240 nm to 400 nm	L10852	4000 h (at 365 nm)
L9566-03 / L9588-03	[Visible light type] 400 nm to 700 nm	L8253	2000 h (at 436 nm)
L9566-04 / L9588-04	[Total reflection type] 300 nm to 800 nm	L8253	2000 h (at 436 nm)
L9566-06A / L9588-06A	[365 nm wide band type] 240 nm to 550 nm	L10852	4000 h (at 365 nm)

NOTE: ① Major spectral distribution. Various optical filters (sold separately) can also be attached. Refer to the spectral distribution graph for details on the spectral distribution.

② L10852 is 200 W super-quiet mercury-xenon lamp. L8253 is 150 W super-quiet xenon lamp (ozone-free type).

SPECIFICATIONS

Parameter	L9566	L9588
Light guide port	Rear	Operation panel (front)
Lamp replacement position	Operation panel (front)	Rear
UV irradiance (Typ.) ①	4500 mW/cm ² Typ. (at 365 nm, -01A type)	
Spectral distribution	Refer to the SELECTION GUIDE	
Lamp for maintenance	Refer to the SELECTION GUIDE	
Guaranteed life	Refer to the SELECTION GUIDE	
Input voltage (AC)	100 V to 240 V (100 V / 200 V auto switching), single phase 47 Hz to 63 Hz	
Power consumption	280 VA Typ.	
Weight	Approx. 6.4 kg	
Operating temperature range	+5 °C to +35 °C	
Storage temperature range	-10 °C to +70 °C	
Operating and storage humidity range	Less than 80 % (no condensation)	

NOTE: ① UV irradiance (at 365 nm) is measured in the center at a point 10 mm away from the output end of the A10014-35-0110 light guide (sold separately) with E5147-04, by using the Hamamatsu C6080-365 UV power meter.

Optical Power Monitor with Optical Feedback E9793-02

Parameter	Description / Value
Monitoring wavelength	365 nm ②
Applicable type	(L9566, L9588) -01A, -02A ③


NOTE: ② Monitoring at other wavelengths is not possible.

③ When optical power monitor order with L9566 and L9588, please tell us the type No. whether (L9566, L9588)-01A-02 or (L9566, L9588)-02A-02.

DIMENSIONAL OUTLINES

L9566


(Unit: mm)

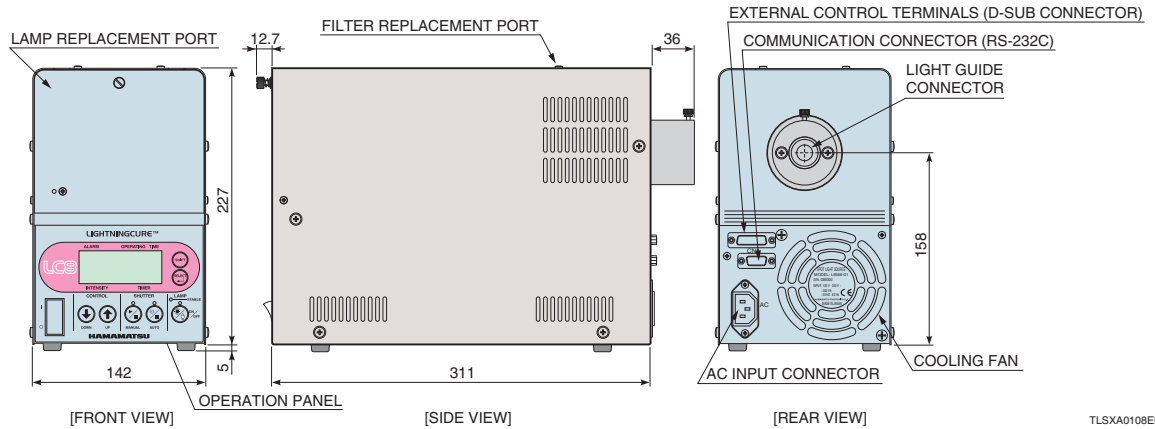

TL5XA0108ED

L9588

(Unit: mm)

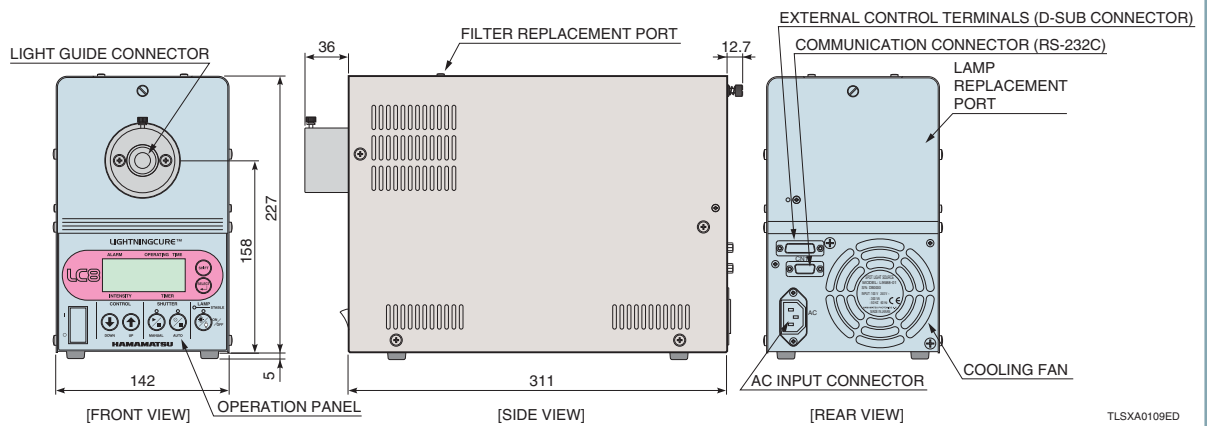

TL5XA0109ED

WARNING

● Light

This equipment emits very strong ultraviolet light which is harmful to eyes and the skin.

Also, as the light emanating from the light guide connection aperture contains infrared light in addition to ultraviolet light, its irradiation will cause heat generation. Be sure to observe following instructions for operation of the equipment.

- Never look directly into the light guide connection aperture or at the light emanating from the light guide. Strong ultraviolet light can cause visual disorder.
- Do not allow light to come into contact with skin. Contact with skin may cause sunburn-grade inflammation. Always wear safety glasses, gloves, and other appropriate protective gear when operating this equipment.
- Never allow light from the light guide to radiate onto flammable material.
- The unit includes an interlock that prevents the lamp from lighting while the top cover is open. Never attempt to override the interlock function by manually depressing the switch, as this may result in uncontrolled release of dangerous ultraviolet light.

● High-Voltage trigger

• The mercury-xenon lamp employed started by a high-voltage (30 kV) pulse applied at the lamp electrodes.

As protection against accidental electrical shock hazard, the design includes an interlock switch that disables lamp operation while the top cover is open. Never attempt to turn on the lamp by blocking the sensor window of the interlock switch.

● Lamp Replacement

• The inside of the lamp housing becomes extremely hot during lamp operation.

Before replacing the lamp, switch it off and run the cooling fan for at least 15 minutes.

• Always exercise due caution when handling or replacing a lamp.

A lamp contains high-pressure gas [approximately 1 MPa (10 atmospheres) at room temperature, approximately 4 MPa (40 atmospheres) during operation] and may burst if dropped or otherwise impacted.

● Inhibition of Removal and Modification

• Do not remove the cover unless absolutely necessary and never touch any of the screws inside the unit. As the internal components of this unit have been precisely adjusted, disassembling or modifying the equipment can cause problems with the unit, fire and electrical shock.

DISPOSAL OF LAMPS

Lamps are filled with high pressure (approx. 1 MPa at room temperature) xenon gas (xenon gas and mercury in mercury-xenon lamps). When disposing of the used lamp, take appropriate measures in compliance with applicable regulations regarding waste disposal and correctly dispose of it yourself, or entrust disposal to a licensed industrial waste disposal company. In any case, be sure to comply with the regulations in your country, state, region or province to ensure the used lamp is disposed of legally and correctly.

WARRANTY PERIOD

This device is guaranteed for one year after delivery date from us. The warranty extends only to replacement of the products. The warranty does not cover damage due to misuse or natural calamity.

LIGHTNINGCURE LC8


ACCESSORY

LIGHT GUIDES

Various light guides using a core material with high UV transmittance are available ranging from the single type up to a 6-furcated type. Select the desired light guide that suits your application.

TYPE NO. GUIDE

A10014-35-0110

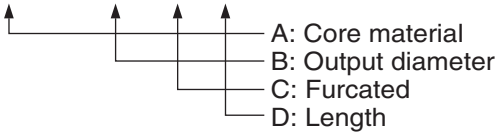

Type No.	Core material
A10014	Synthetic silica
A10015	Glass (for-03 type)


Suffix	Output diameter
35	φ3.5 mm
50	φ5 mm
70	φ7 mm

Suffix	Furcated
01	Single
04	4
06	6

Suffix	Length
10	1 m

DIMENSIONAL OUTLINE OF OUTPUT END

(UNIT: mm)

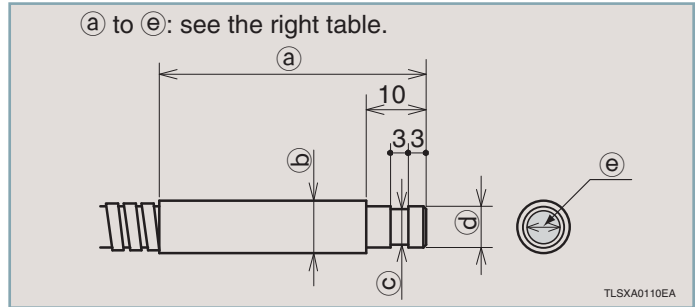


MAIN LIGHT GUIDE

Type No.				a	b	c	d	e
A	B	C	D					
A10014	35	01	10	45	φ8	φ5.8	φ6	φ3.5
A10014	35	02	10					
A10014	35	03	10					
A10014	35	04	10					
A10014	35	05	10					
A10014	35	06	10					
A10014	50	01	10	60	φ11	φ6.5	φ7	φ5
A10014	50	02	10					
A10014	50	03	10					
A10014	50	04	10					
A10014	70	01	10	60	φ14	φ8.5	φ9	φ7
A10015	50	01	10					


IRRADIANCE DISTRIBUTION <Typ.>

* Relative irradiance: 100 % is equal to 3500 mW/cm², the irradiance at the distance of 10 mm from the output end of the A10014-50-0110 (without condenser lens).
* Z: Distance from output end


A10014-35-0110 (at 365 nm)

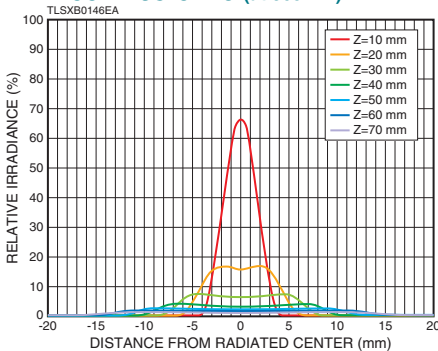


A10014-50-0110 (at 365 nm)

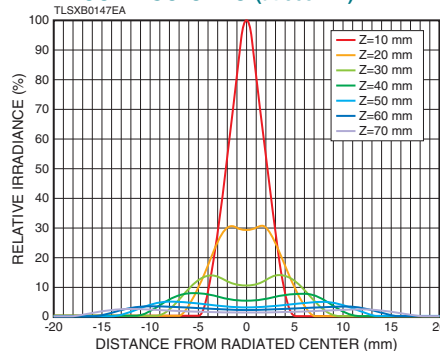

A10014-70-0110 (at 365 nm)

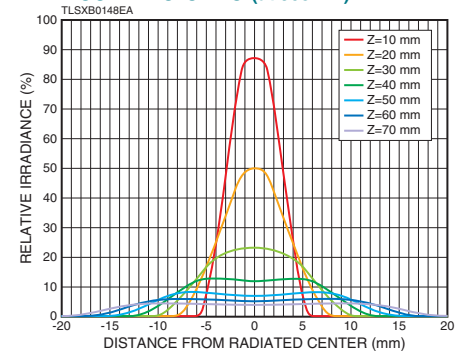

A10015-50-0110 (at 436 nm)*

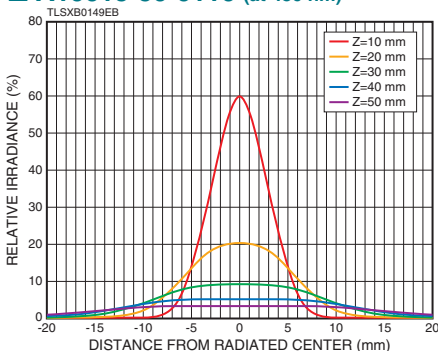

MAXIMUM IRRADIANCE FOR FURCATED FIBER

A10014-35 SERIES (Suffix, lower 4 digits)

Single (-0110)	2 furcated (-0210)	3 furcated (-0310)	4 furcated (-0410)	5 furcated (-0510)	6 furcated (-0610)
65 %	60 %	50 %	45 %	40 %	35 %

A10014-50 SERIES (Suffix, lower 4 digits)

Single (-0110)	2 furcated (-0210)	3 furcated (-0310)	4 furcated (-0410)
100 %	75 %	60 %	50 %

* 100 % is equal to the irradiance (436 nm) at the distance of 10 mm from the output end of the A10014-50-0110 (without condenser lens).


ACCESSORY

CONDENSER LENSES

Condenser lenses collect light emitted from a light guide and make it illuminate an object efficiently.


DIMENSIONAL OUTLINE

LONG FOCAL POINT CONDENSER LENS E5147,-02

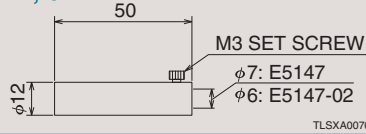


TLSXA0070EB

LONG FOCAL POINT CONDENSER LENS E7658-01,-02

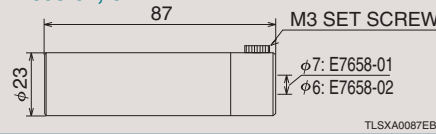

TLSXA0087EB

SHORT FOCAL POINT CONDENSER LENS E5147-03,-04




TLSXA0071EB

IRRADIANCE DISTRIBUTION <Typ.>

* Relative irradiance: 100 % is equal to the irradiance at the distance of 10 mm from the output end of each light guide (without condenser lens).


* Z: Distance from output end

LONG FOCAL POINT CONDENSER LENS E5147 (Output diameter: φ5 mm)

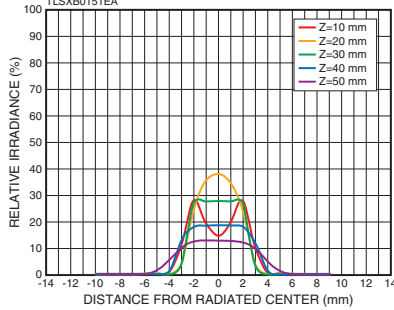


TLSXB0151EA

LONG FOCAL POINT CONDENSER LENS E7658-01 (Output diameter: φ5 mm)

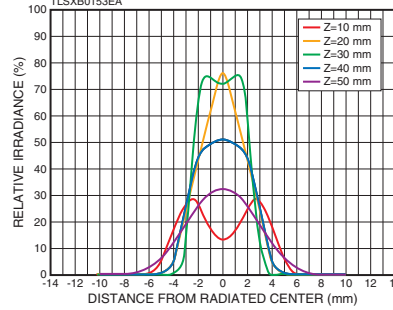


TLSXB0153EA

SHORT FOCAL POINT CONDENSER LENS E5147-03 (Output diameter: φ5 mm)

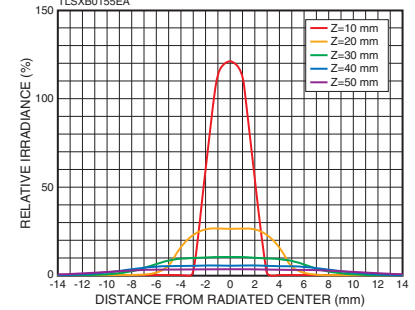


TLSXB0155EA

LONG FOCAL POINT CONDENSER LENS E5147-02 (Output diameter: φ3.5 mm)

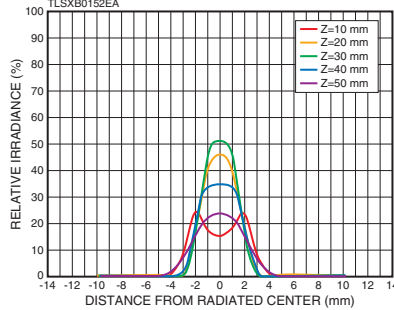


TLSXB0152EA

LONG FOCAL POINT CONDENSER LENS E7658-02 (Output diameter: φ3.5 mm)

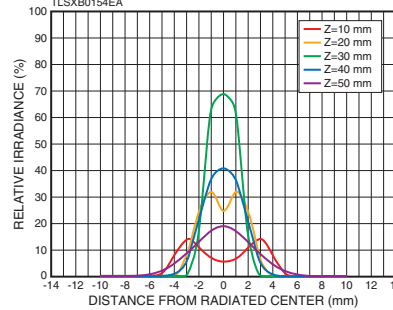

TLSXB0154EA

SHORT FOCAL POINT CONDENSER LENS E5147-04 (Output diameter: φ3.5 mm)

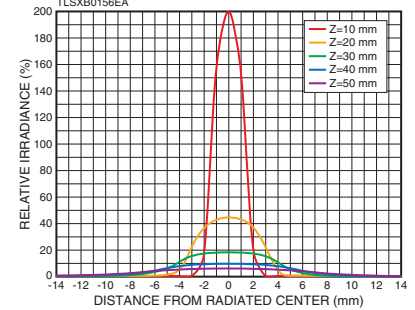

TLSXB0156EA

CONDENSER LENSES (Uniform illumination)


Hamamatsu also provides a special lens that uniformly illuminates an entire surface.

We offer a choice of lenses for uniformly irradiating an entire target area. We provide a condenser lens type that attaches to the tip of the light guide, and a uniform direct irradiation unit that attaches directly to the body of the spot light source.

This uniform direct irradiation unit allows uniform irradiation onto the target surface area with irradiance variations within about 5%. Three different lens types are available according to the size of the irradiation surface area.

Efficiently emits light at wavelengths longer than 300 nm.


DIRECT BEAM UNIFORM ILLUMINATION UNIT UNIFORMITY

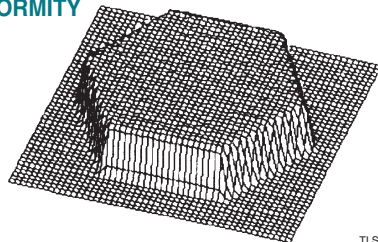

TLSXC0039EA


DIMENSIONAL OUTLINE (UNIT: mm)

DISTANCE FROM OUTPUT END E5147-06



TLSXA0074ED

DIRECT BEAM UNIFORM ILLUMINATION UNIT

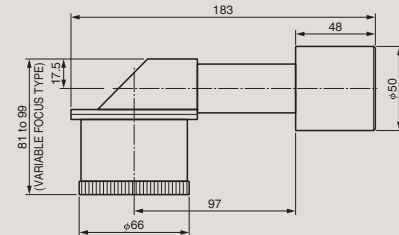








TLSXA0112ED

* The holder of the main body needs to be changed.

LIGHTNINGCURE LC8



Condenser lenses are recommended when illuminating an object located away from the light guide end.

(UNIT: mm)

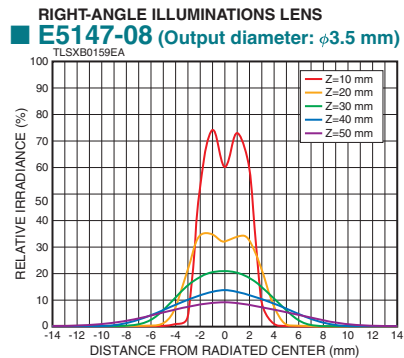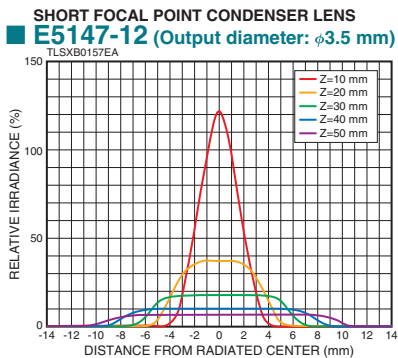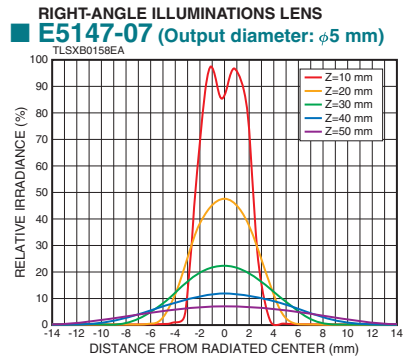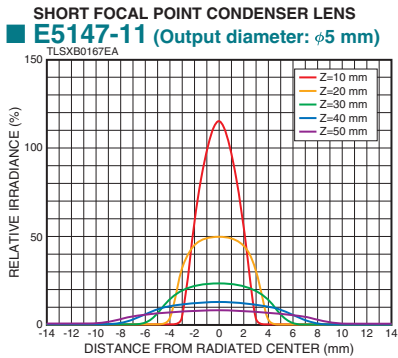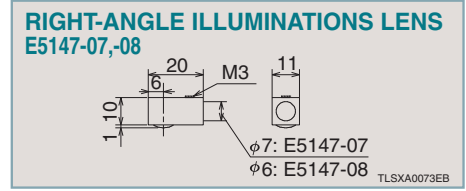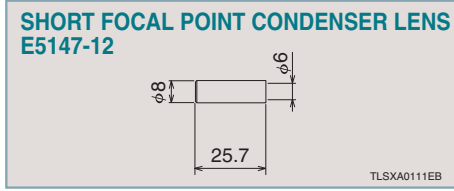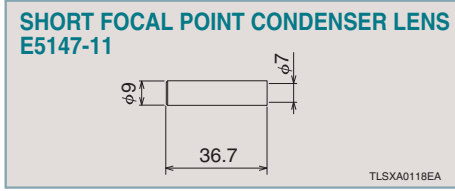

IRRADIANCE DISTRIBUTION <Typ.>

* Relative irradiance: 100 % is equal to 3500 mW/cm², the irradiance at the distance of 10 mm from the output end of the A10014-50-0110 (without condenser lens).

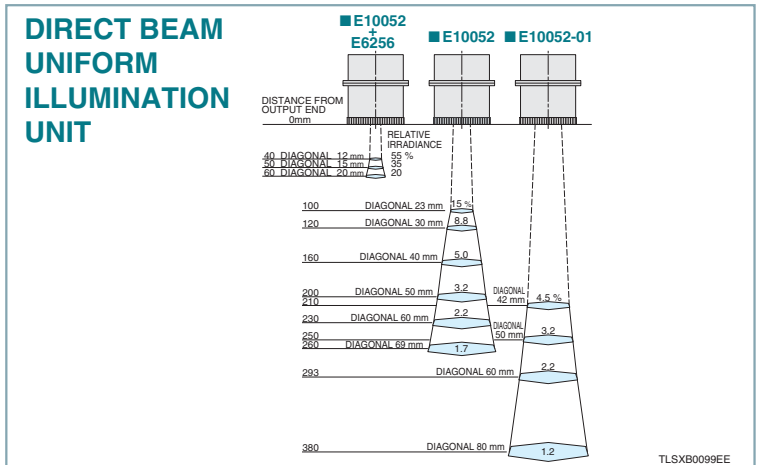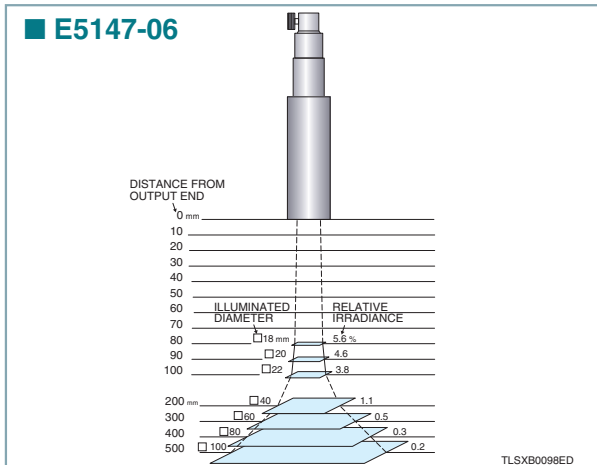

ACCESSORY

FILTERS

Eight types of filters are available, including UV-transmitting filters that efficiently transmit only the UV light needed for UV curing, as well as infrared cut filters and UV cut filters. Please select the filter that matches your applications. The types "-03" and "-05" are designed to minimize heat generation from the irradiated surface, making them effective when bonding components that are vulnerable to heat. These filters have a long service life. Almost no drop in the transmittance even after 10000 hours of operation.


SPECIFICATIONS

Type No.	Number of filter used	Transmittance wavelength (nm)	Transmittance (%)	Note
A9616-03	1	280 to 400	Approx. 85	High UV transmittance, block heat
A9616-05	2	350 to 400	Approx. 80	Cuts off heat over a wide spectral range more efficiently than -03 type.
A9616-06	1	300 to 480	Approx. 85	Block visible to infrared light
A9616-07	2	355 to 375	Approx. 50	Transmissive light of around 365 nm only
A9616-08*	1	350 to 600	Approx. 85	Transmissive visible light and block infrared light
A9616-09	1	over 400	Approx. 95	Block UV light
A9616-10	2	300 to 400	Approx. 85	Block infrared light
A9616-11	2	230 to 250	Approx. 60	Transmissive light of around 248 nm only


* This is only available with light source -03.

SPECTRAL DISTRIBUTION WITH A FILTER ATTACHED


■ A9616-03 (Light source: -01A)

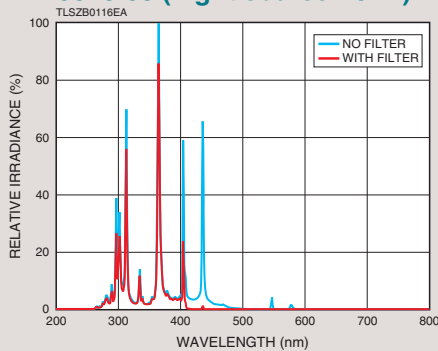


■ A9616-05 (Light source: -01A)

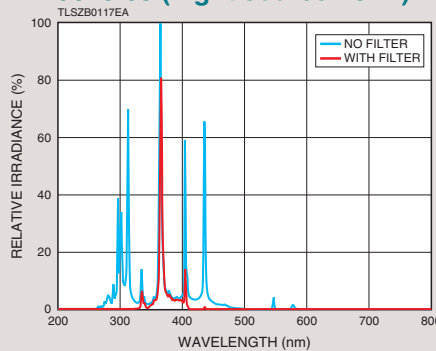


■ A9616-06 (Light source: -06A)

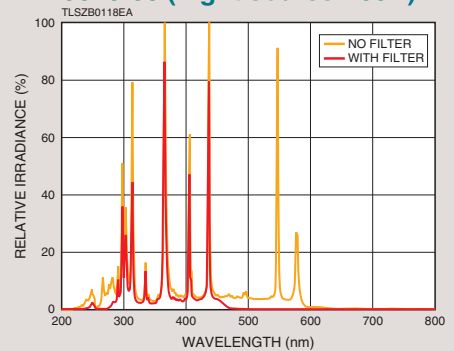


■ A9616-07 (Light source: -01A)

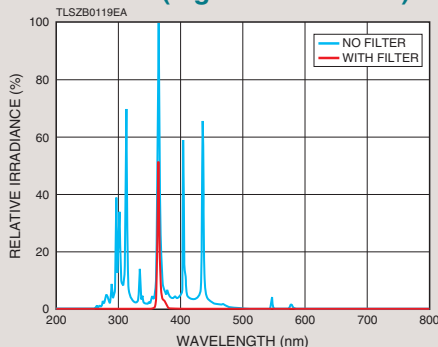


■ A9616-08 (Light source: -03)*

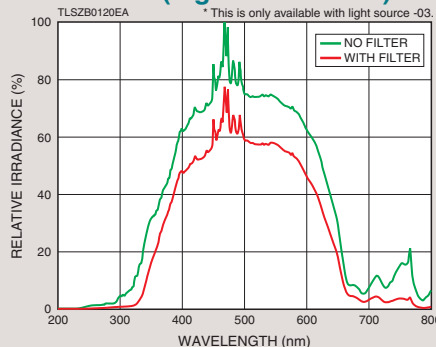


■ A9616-09 (Light source: -03)

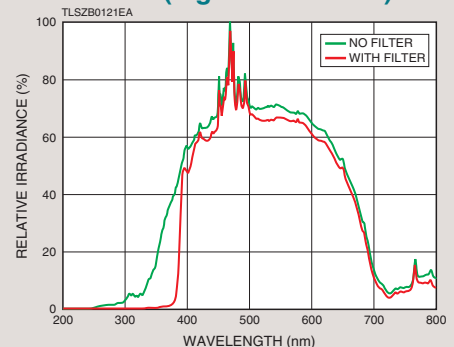

■ A9616-10 (Light source: -01A)

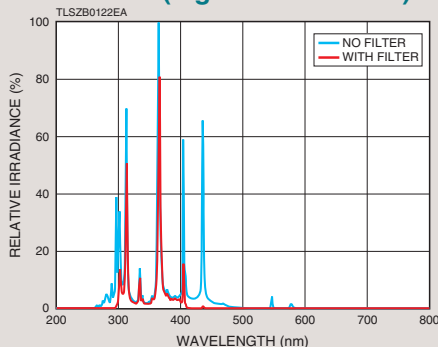


■ A9616-11 (Light source: -02A)

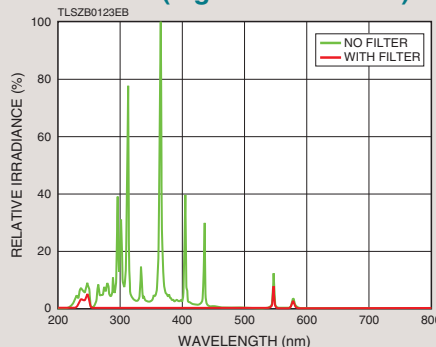


DIMENSIONAL OUTLINE

(UNIT: mm)

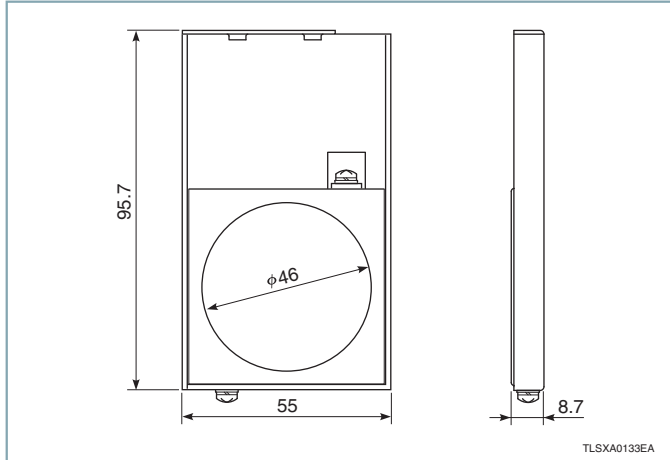

TEMPERATURE COMPARISON ON THE ILLUMINATED SURFACE

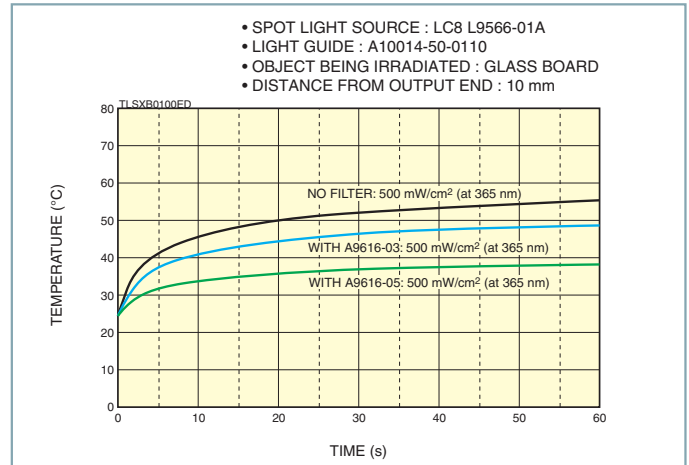

NOTE: The data shown above is typical values measured by Hamamatsu, just for your reference. Actual performance may greatly depend on the object to be illuminated and distance to it, and may differ from the above data.

FOOT SWITCH

E8263 SERIES

Pushing on the E8263 foot switch opens and closes the shutter. These are highly effective when a worker is using 1 or more spot light sources.

Different product series are available according to the cable length, connection method and operating method you need.

Type No.	Cable length	Connection	Operation
E8263-12	2 m	Terminal block	Manual shutter or auto shutter selectable
E8263-15	5 m		
E8263-22	2 m	D-SUB connector	Manual shutter
E8263-25	5 m		Auto shutter
E8263-32	2 m		
E8263-35	5 m		



LIGHT GUIDE CAP

A9739 SERIES

The A9739 is a light guide cap for protecting the exit end of a light guide from gas evaporating from adhesive and from dust and scratches.

The light-transmitting window fitted to the cap is easily exchangeable with a spare window (supplied) so there is no maintenance or cleaning down-time. Protecting the light guide end with an A9739 light guide cap eliminates shipping and repair costs required for re-polishing. Two types of light guide caps and replaceable windows are available according to the light guide bundle diameter.

PROTECTIVE CAP (supplied with one replacement window)

A9739-06: Light guide bundle diameter 3.5 mm

A9739-07: Light guide bundle diameter 5 mm

REPLACEMENT WINDOW (material: quartz)

A9740: For light guide bundle diameters 3.5 mm and 5 mm



PROTECTIVE GLASSES

A6905-01

The A6905-01 protective glasses are eyewear for protection against powerful UV radiation. When working with UV radiation, always wear protective glasses or eyewear for eye protection.



RELATED PRODUCTS

UV POWER METER

C6080 SERIES

The C6080 series is a UV power meter designed to measure irradiance. It is easy to carry and operate, and so can be used anywhere and anytime. It also exhibits little degradation in UV sensitivity, allowing stable measurements with high repeatability.

Type No.	Effective area (mm)	Calibrated wavelength (nm)	Measurement range (mW/cm ²)
C6080-02	φ6	248	1 to 1999
C6080-365	φ1	365	10 to 19990
C6080-365-03	φ1	365	1 to 1999
C6080-385	φ1	385	10 to 19990
C6080-04	φ1	436	1 to 1999



UV INTENSITY INTEGRABLE POWER METER

H12684 series, C12144

The H12684 series and C12144 are designed to function as a power meter that measures irradiance and integrated power. The H12684 series sensor head exhibits little degradation in UV sensitivity, allowing stable measurements with high repeatability.

Type No.		Effective area (mm)	Calibrated wavelength (nm)	Measurement range	
Sensor head	Controller			Irradiance	Integrated power
H12684-365	C12144	φ1	365	0.1 mW/cm ² to 100 W/cm ²	0.1 mJ/cm ² to 9999 J/cm ²
H12684-385			385		
H12684-395			395		
H12684-405			405		



UV-LED SPOT LIGHT SOURCE LIGHTNINGCURE® LC-L1V5

The LC-L1V5 is a compact, lightweight, palm-top size UV-LED spot light source with independently controllable 4 heads. The LC-L1V5 can be installed either vertically or horizontally even in a small space, allowing flexible layout in any place. Our unique feedback function enables the LC-L1V5 to achieve constant light output with variations held within ±5 % even immediately after it starts lighting.



LINEAR IRRADIATION TYPE UV-LED UNIT LIGHTNINGCURE® LC-L5G

The LIGHTNINGCURE LC-L5G is a linear irradiation type UV-LED light source that delivers high output despite its compact, lightweight, and air-cooled design. The LC-L5 provides the highest level output that exceeds the output of metal-halide lamps and other UV-LED light sources, and so helps increase the performance of equipment that uses UV light sources. We also offer a wide lineup of UV-LED light sources to meet diverse customer needs.



* **LIGHTNINGCURE** is registered trademark of Hamamatsu Photonics K.K..

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2019 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K. www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH.: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: 1201 Tower B, Jiaming Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R.China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No.158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw

TLSZ1008E05

MAR. 2019 IP