

The C9536/H9958 series are optical power meters designed to measure absolute optical power of UV light (mW/cm<sup>2</sup>). These optical power meters have a flat spectral response over a wide UV wavelength region, and are capable of measuring the optical power independent of the spectral emission distribution of a light source to be measured. Unlike commonly available UV power meters, optical power of various UV light sources can be easily measured with just one unit of this power meter, without having correct each wavelength of emitted light. A combination of the C9536-02 and H9958-02 is suitable for measuring the optical power of high output UV-LED.

Also, we recommend a combination of the C9536-01 and H9958 as a power meter to measure the optical power of light sources for photocatalysis.



Left: Controller C9536-01  
Right: Sensor Head H9958-01



Left: Controller C9536-02  
Right: Sensor Head H9958-02

## FEATURES

- Traceable to National Standard in Japan and a Certificate of Calibration is Appended
- Flat Spectral Response Characteristics Over a Wide UV Region
- High Sensitivity (detectable down to 1 μW/cm<sup>2</sup>) (H9958, H9958-01)
- Compatible with high output UV-LED (H9958-02)
- Ideal for Monitoring / Controlling Light Source Power for Photocatalyst (H9958)

## APPLICATIONS

Monitoring, Measurement and Control of:

- Black Light
- UV LED
- Ultraviolet Rays (UV-A)
- Mercury-Xenon Lamp
- High Pressure Mercury-Xenon Lamp
- Deuterium Lamp

## SPECIFICATIONS

### CONTROLLER: C9536-01/C9536-02

Parameter		Description / Value
Measurement Mode	Continuous	This mode makes continuous measurements at a sampling rate of 1 second.
	Integration	This mode displays a result integrated over a certain period of time (adjustable from 1 second to 5 minutes in 1 second steps).
	One Shot (C9536-01 only)	This mode makes one measurement each time START switch is pressed.
	Peak Hold (C9536-02 only)	This mode holds the peak values in continuous measurement.
External Interface		RS-232C
Power Requirement		Internal battery or AC adapter
Dimensions (W × H × D)		75 mm × 110 mm × 20 mm
Operating Ambient Temperature / Humidity		0 °C to +40 °C / Below 80 %
Storage Temperature / Humidity		-20 °C to +50 °C / Below 80 %
Weight		Approx. 285 g


Supplied: RS-232C cable (2 m), Analog output cable (2 m), AC adapter, AC cable

### SENSOR HEAD: H9958 SERIES

Parameter	Description / Value		
Controller and Sensor Head Combination	C9536-01		C9536-02
Type	H9958	H9958-01	H9958-02
Spectral Response	310 nm to 380 nm	300 nm to 410 nm	
Effective Area	φ10 mm		φ1 mm
Measurement Range	1 μW/cm <sup>2</sup> to 100 mW/cm <sup>2</sup>		100 μW/cm <sup>2</sup> to 10 W/cm <sup>2</sup>
Dimensions (W × H × D)	55 mm × 75 mm × 18 mm		
Operating Ambient Temperature / Humidity	0 °C to +45 °C / Below 80 %		0 °C to +60 °C / Below 80 %
Storage Temperature / Humidity	-20 °C to +50 °C / Below 80 %		-20 °C to +60 °C / Below 80 %
Weight	Approx. 195 g		


# UV POWER METER C9536, H9958 SERIES

Figure 1: Relative Spectral Response Characteristics of Detector (Typ.)  
(H9958: 310 nm to 380 nm)

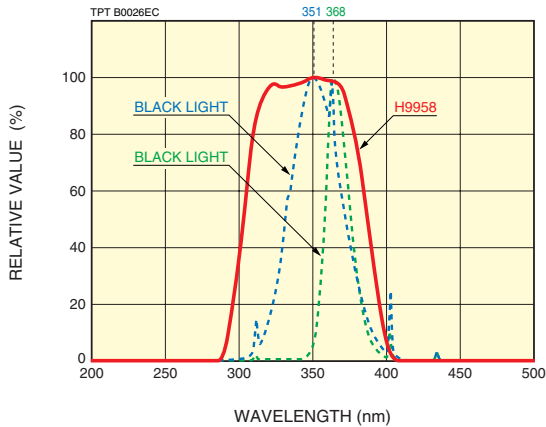

Note: Slight response may occur at some wavelength over 500 nm.

Figure 2: Relative Spectral Response Characteristics of Detector (Typ.)  
(H9958-01/-02: 300 nm to 410 nm)

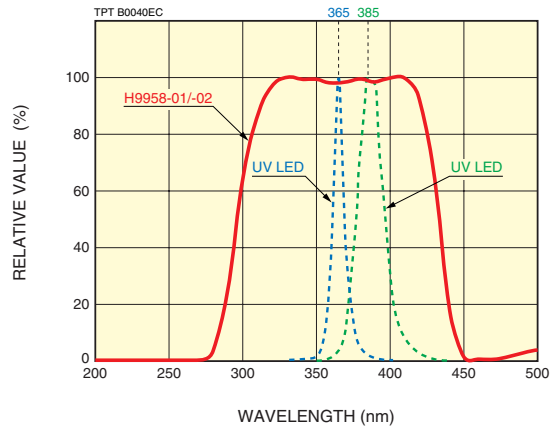

Note: Slight response may occur at some wavelength over 500 nm.

Figure 3: Detector Sensitivity vs. Incident Light Angle (Typ.)



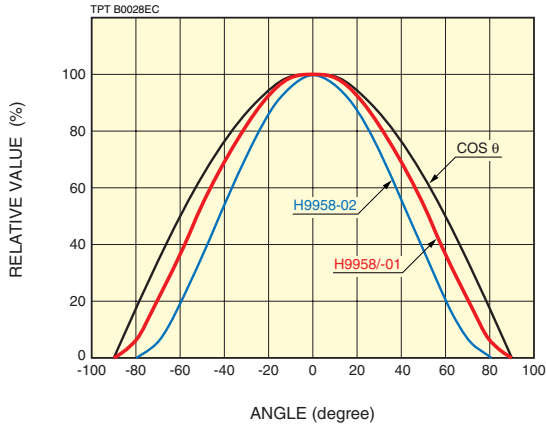


Figure 4: Dimensional Outline (Unit: mm)

●Sensor Head: H9958 Series

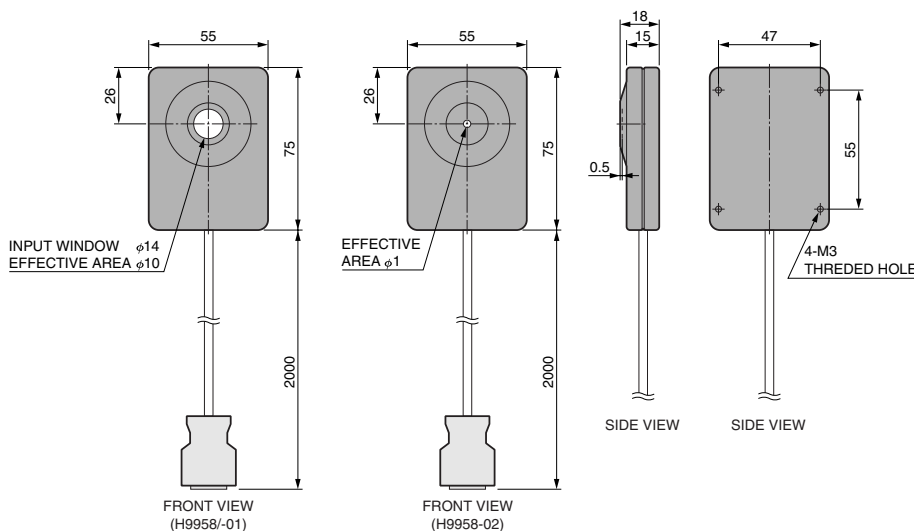

●Controller: C9536 Series

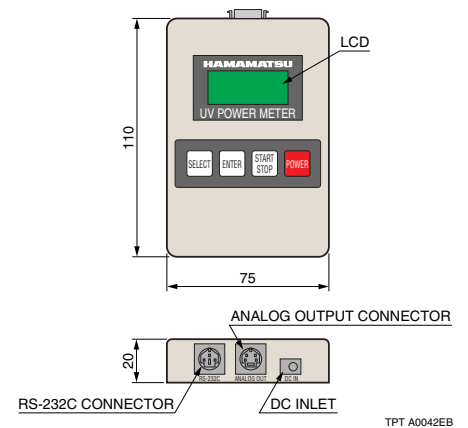

●Controller and Sensor Head Combination

Controller	Sensor Head
C9536-01	H9958, H9958-01
C9536-02	H9958-02

**HAMAMATSU PHOTONICS K.K.** [www.hamamatsu.com](http://www.hamamatsu.com)

**HAMAMATSU PHOTONICS K.K., Electron Tube Division**

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 SE-164 40 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93581733, Fax: (39)02-93581741 E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: B1201 Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No.158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)03-659-0080, Fax: (886)07-811-7238 E-mail: info@tw.hpk.co.jp

TPT 1026E02  
MAY 2016 IP