

L5766/L6287

Miniature LED

L5766 is a red LED molded into a clear plastic package that emits light at a peak wavelength of 660 nm. L6287 is a high-power infrared LED having the same type of package that emits light at a peak wavelength of 940 nm.

Features

- **L5766: Red LED (peak emission wavelength: 660 nm)**
- **L6287: High-power infrared LED (peak emission wavelength: 940 nm)**
- **Miniature plastic package with lens**

Applications

- **Displacement meters**
- **Optical proximity switches**
- **Low-speed optical links (L5766)**

Absolute maximum ratings (Ta=25 °C)


Parameter	Symbol	Condition	L5766	L6287	Unit
Forward current	IF			60	mA
Reverse voltage	VR			5	V
Pulse forward current	IFP	Pulse width: 100 μs Duty ratio: 1 %	0.5	1.0	A
Power dissipation	P			90	mW
Operating temperature	Topr			-25 to +85	°C
Storage temperature	Tstg			-30 to +85	°C
Soldering	-			260 °C, 3 s at least 2.5 mm away from package surface	-

Electrical and optical characteristics (Ta=25 °C)

Parameter	Symbol	Condition	L5766			L6287			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Peak emission wavelength	λp	IF=20 mA	-	660	-	-	940	-	nm
Spectral half width	Δλ	IF=20 mA	-	20	-	-	60	-	nm
Forward voltage	VF	IF=20 mA	-	1.8	2.3	-	1.25	1.45	V
Reverse current	IR	VR=5 V	-	-	10	-	-	10	μA
Fiber coupled optical power *	Po	IF=20 mA	8	-	-	-	-	-	μW
Radiant flux	φe	IF=20 mA	-	-	-	1.4	-	-	mW
Terminal capacitance	Ct	VR=0 V, f=1 MHz	-	30	-	-	20	-	pF
Rise time	tr	IF=20 mA	-	-	300	-	-	-	ns
Fall time	tf	IF=20 mA	-	-	300	-	-	-	ns

* Optical fiber: APF 485/500 μm, L=1 m, open area ratio=0.5; Measurement conditions: The center of the optical fiber is aligned with the center of the lens on the package. The distance between the fiber end and the lens top is 0.2 mm.


Directivity

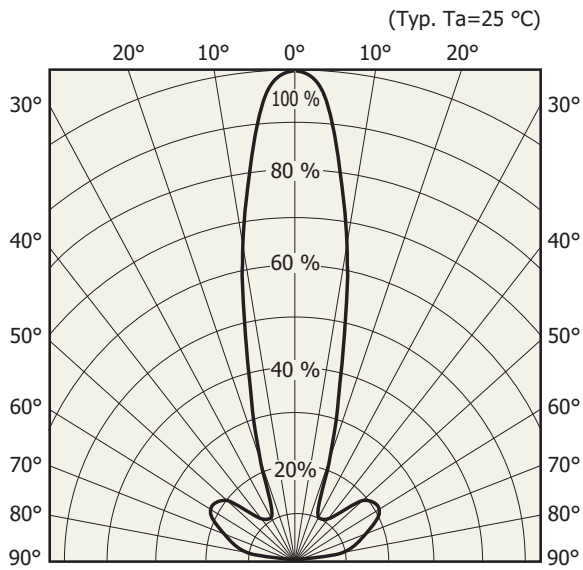

Relative radiant output

KLEDB0061EB


Radiant output vs. ambient temperature

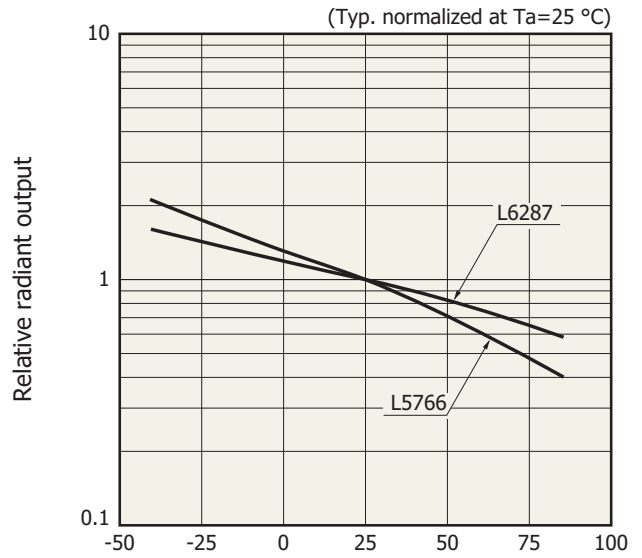

Ambient temperature ($^\circ\text{C}$)

KLEDB0106EB


Allowable forward current vs. ambient temperature

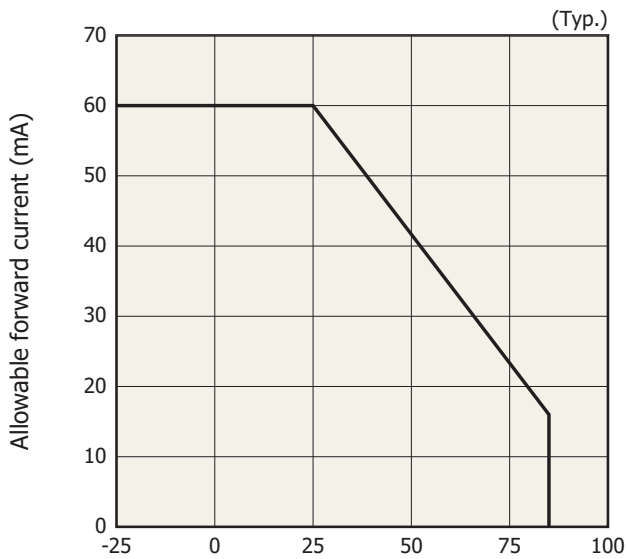

Ambient temperature ($^\circ\text{C}$)

KLEDB0083EB


Pulse forward current vs. duty ratio

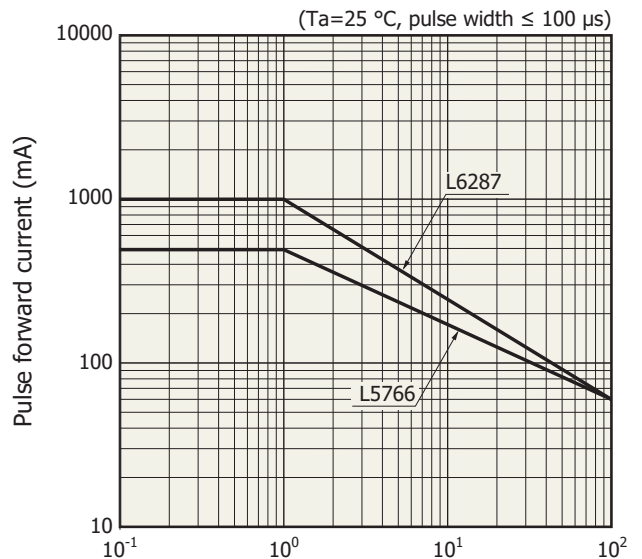

Duty ratio (%)

KLEDB0107EB

Dimensional outline (unit: mm)

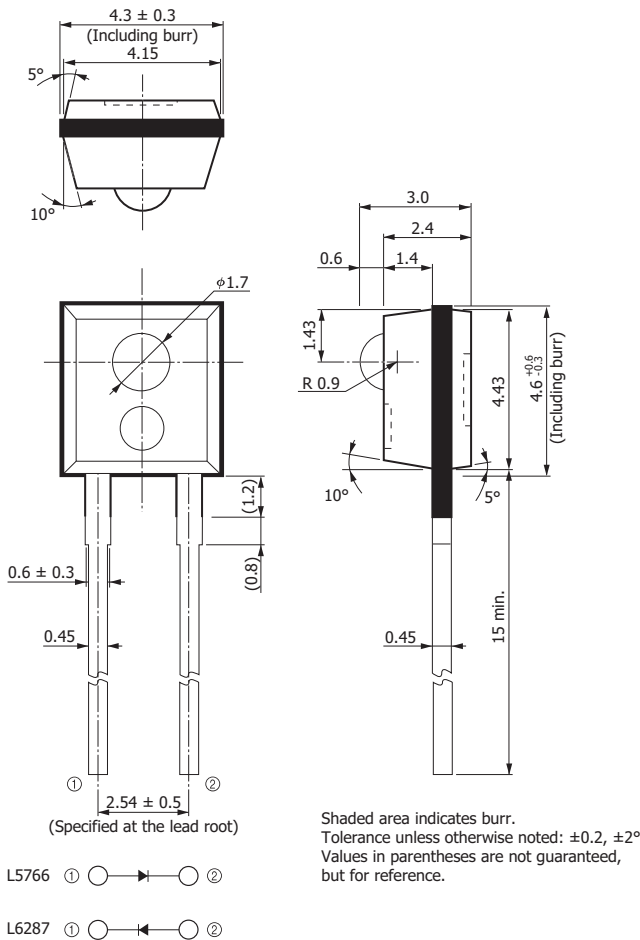

KLEDA0024EB

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Metal, ceramic, plastic packages

■ Technical information

- LED

Information described in this material is current as of September 2017.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39) 02-93581733, Fax: (39) 02-93581741

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866