


Mid infrared LED

L15893/L15894/L15895 series

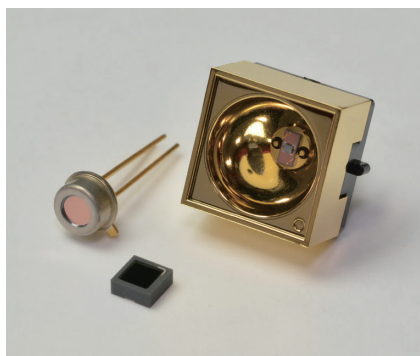

Peak emission wavelength: 3.3 μm, 3.9 μm, 4.3 μm

The L15893 series, L15894 series, L15895 series are mid infrared LEDs with the peak wavelength of 3.3 μm, 3.9 μm, and 4.3 μm respectively, manufactured using Hamamatsu unique crystal growth and process technologies. Output is significantly increased compared to the previous products. These are suitable as light sources mounted in gas detectors.

Features

- High output
- High-speed response
- High reliability
- Low power consumption
- Small surface mount type ceramic package (L15893-0330C, L15894-0390C, L15895-0430C)
- TO-46 with reflector (for light condensing) (L15893-0330ML, L15894-0390ML, L15895-0430ML)

Applications

- Gas detection (CH₄, CO₂)

Structure

Type no.	Package	Window material
L15893-0330C	Surface mount type ceramic*1	Si with AR coating
L15893-0330M	TO-46	
L15893-0330ML	TO-46 with reflector	None*2
L15894-0390C	Surface mount type ceramic*1	Si with AR coating
L15894-0390M	TO-46	
L15894-0390ML	TO-46 with reflector	None*2
L15895-0430C	Surface mount type ceramic*1	Si with AR coating
L15895-0430M	TO-46	
L15895-0430ML	TO-46 with reflector	None*2

*1: These products are not hermetically sealed.

*2: To protect the emission section, protective tape is applied to the surface of the product. Remove the tape after assembly.

▣ Absolute maximum ratings (Ta=25 °C, unless otherwise noted)

Type no.	Reverse voltage V _R (V)	Forward current I _F (mA)	Pulse forward current I _{FP} *3 (A)	Power dissipation P (mW)	Operating temperature T _{opr} *4 (°C)	Storage temperature T _{stg} *4 (°C)	Soldering temperature T _{sol} (°C)
L15893-0330C	1	100	0.5	340	-40 to +85	-40 to +100	240 (twice)*5
L15893-0330M					-20 to +60	-20 to +60	-
L15893-0330ML					-20 to +60	-20 to +60	-
L15894-0390C				280	-40 to +85	-40 to +100	240 (twice)*5
L15894-0390M					-20 to +60	-20 to +60	-
L15894-0390ML					-20 to +60	-20 to +60	-
L15895-0430C				260	-40 to +85	-40 to +100	240 (twice)*5
L15895-0430M					-20 to +60	-20 to +60	-
L15895-0430ML	-20 to +60	-20 to +60	-				

*3: Pulse width=10 μs, duty ratio=1%

*4: No dew condensation

When there is a temperature difference between a product and the surrounding area in high humidity environments, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

*5: Reflow soldering, JEDEC J-STD-020 MSL 3, see P.10


Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

▣ Electrical and optical characteristics (Ta=25 °C)


Type no.	Peak emission wavelength λ _p *6			Spectral half width Δλ*6		Radiant flux φ _e *6		Forward voltage V _F *6		Rise time t _r 10 to 90%
	Min. (μm)	Typ. (μm)	Max. (μm)	Typ. (μm)	Max. (μm)	Min. (mW)	Typ. (mW)	Typ. (V)	Max. (V)	Max. (μs)
L15893-0330C	3.1	3.3	3.4	0.4	0.6	0.8	1.3	2.7	3.2	1
L15893-0330M						1.1	1.9			
L15893-0330ML						1.6	2.6			
L15894-0390C	3.8	3.9	4.1	0.6	0.9	0.8	1.4	2.2	2.7	
L15894-0390M						1.0	1.7			
L15894-0390ML						1.4	2.4			
L15895-0430C	4.1	4.3	4.4	1.0	1.3	0.45	0.75	2.0	2.5	
L15895-0430M						0.6	1.0			
L15895-0430ML						0.8	1.4			

*6: I_F=80 mA, QCW (quasi continuous wave) mode (pulse width=100 μs, duty ratio=50%)


Emission spectrum

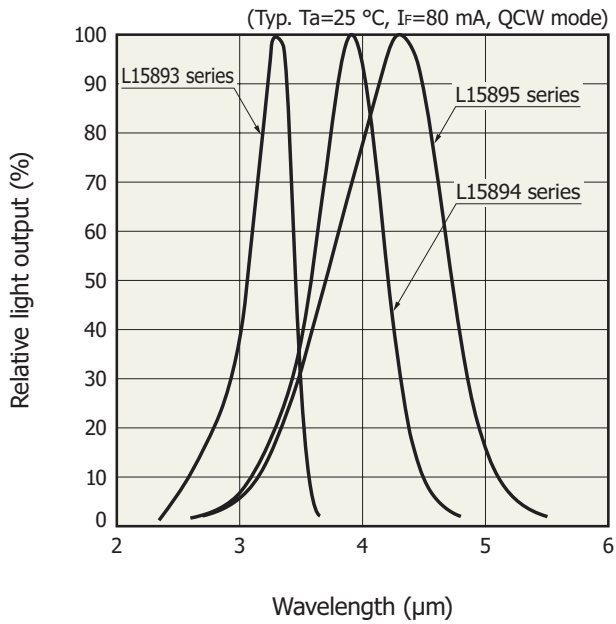

Pulse forward current vs. pulse forward voltage

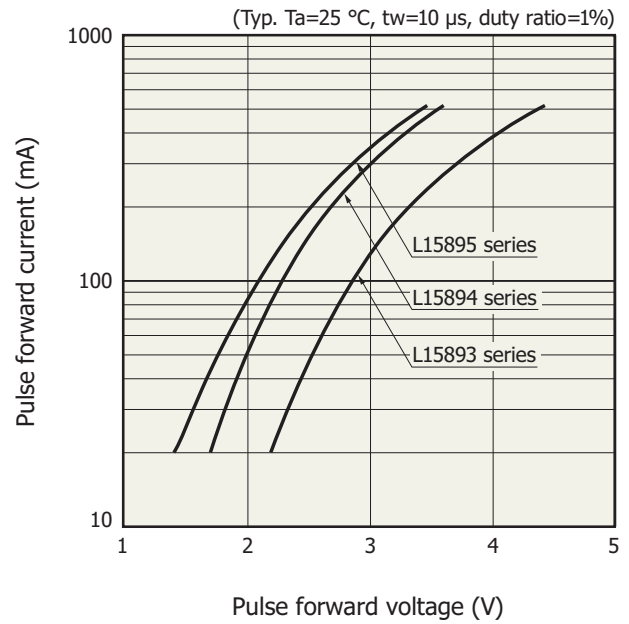


Light output vs. ambient temperature

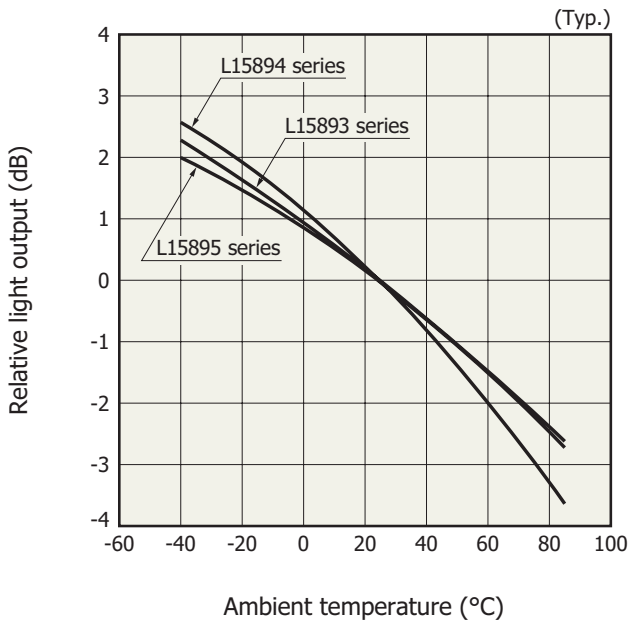


L15893-0330ML, L15894-0390ML, L15895-0430ML:
operating temperature = -20 to $+60\text{ }^\circ\text{C}$

Radiant flux vs. pulse forward current


L15893 series

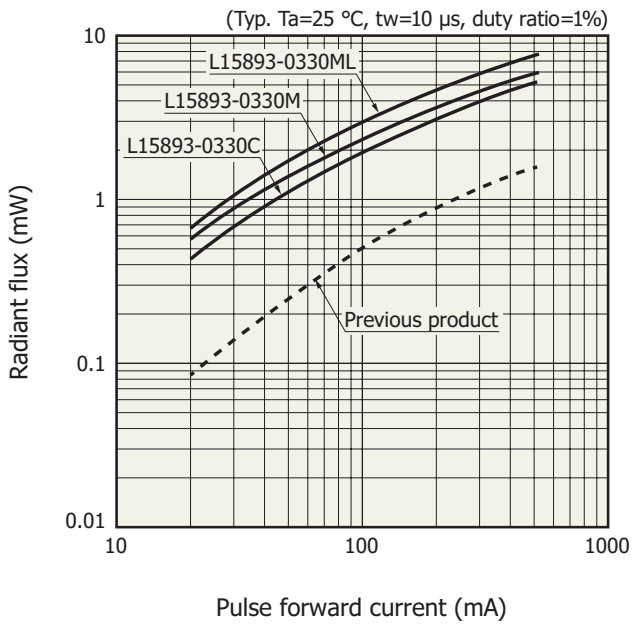

L15894 series

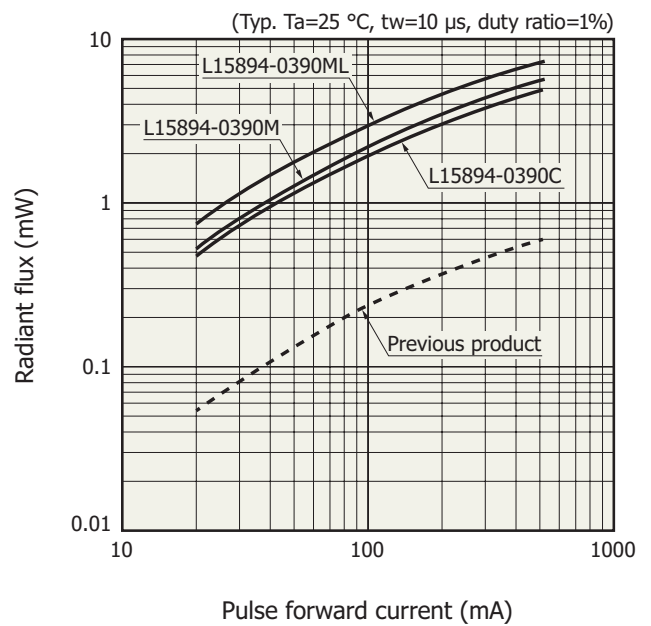


L15895 series

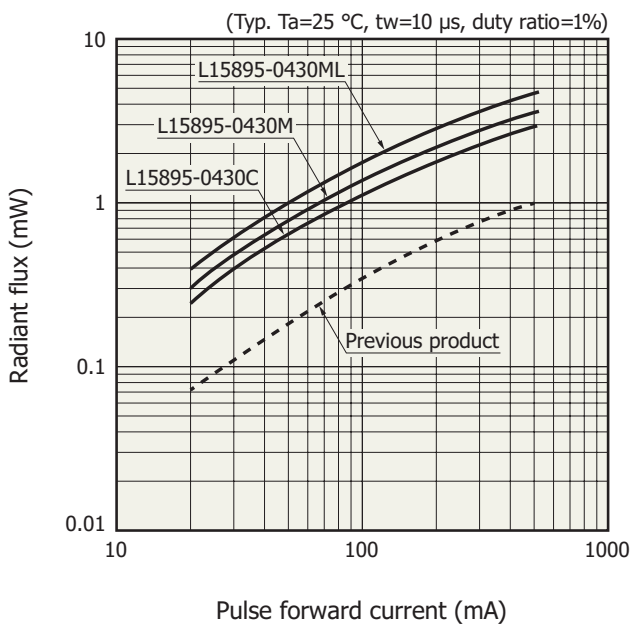


Temperature characteristics of emission spectrum


L15893 series

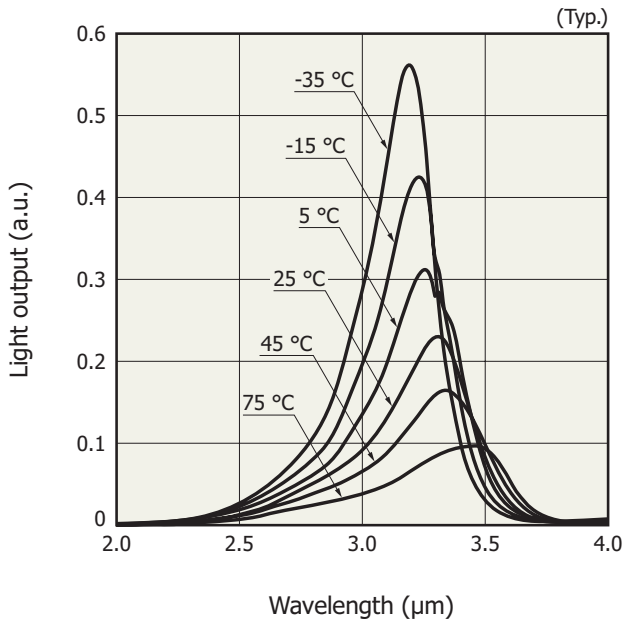

L15894 series

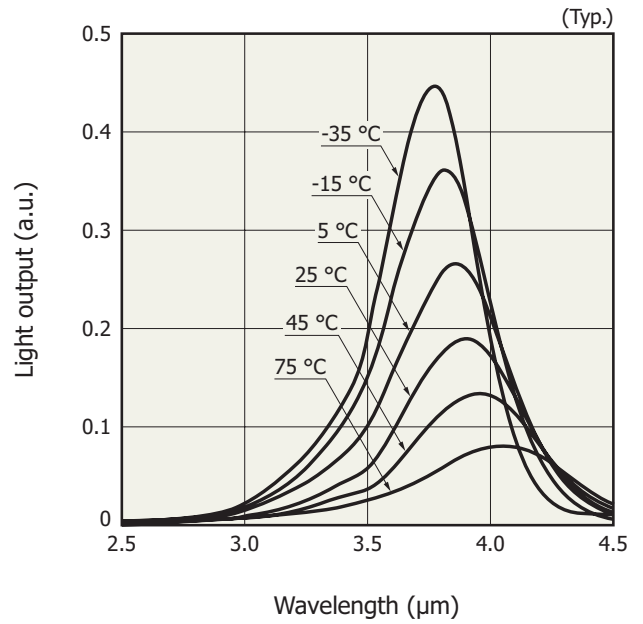


L15895 series

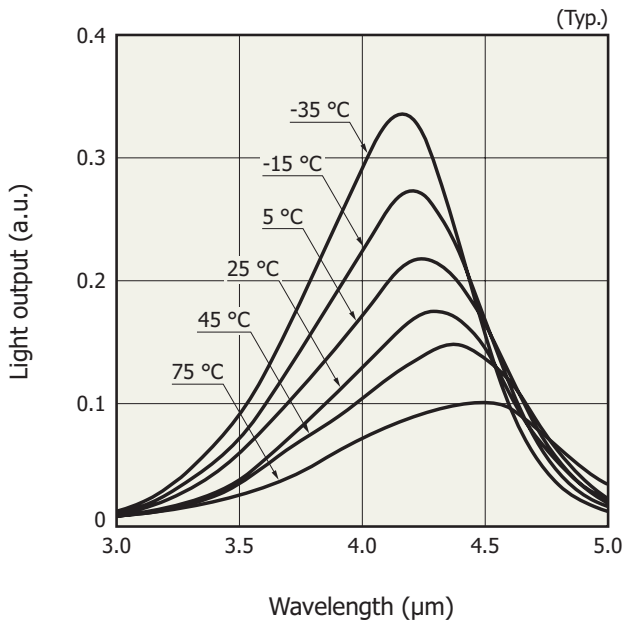

L15893-0330ML, L15894-0390ML, L15895-0430ML:
operating temperature = -20 to +60 °C


Directivity

L15893-0330C, L15894-0390C, L15895-0430C

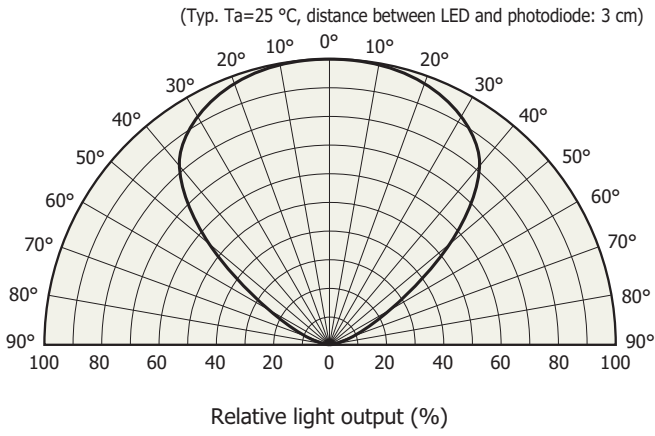


KLEDB0464EA

L15893-0330M, L15894-0390M, L15895-0430M

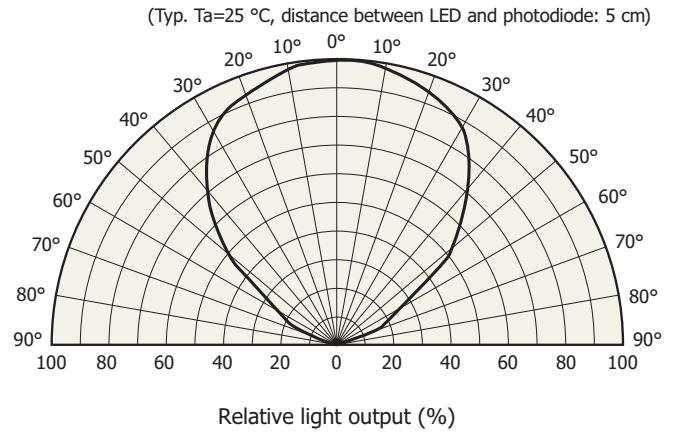


KLEDB0452EA

L15893-0330ML, L15894-0390ML, L15895-0430ML

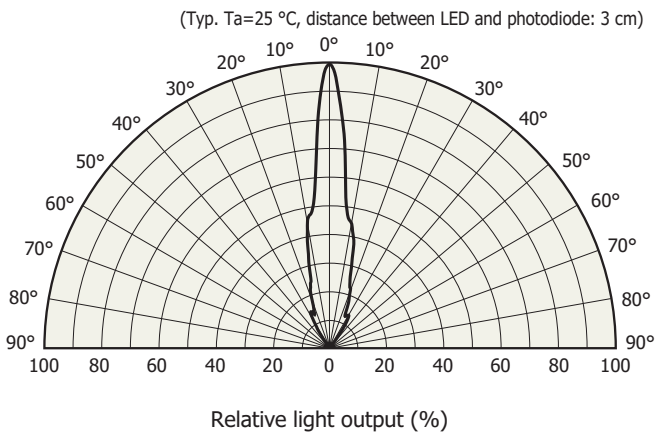


KLEDB0549EA

Allowable forward current vs. ambient temperature

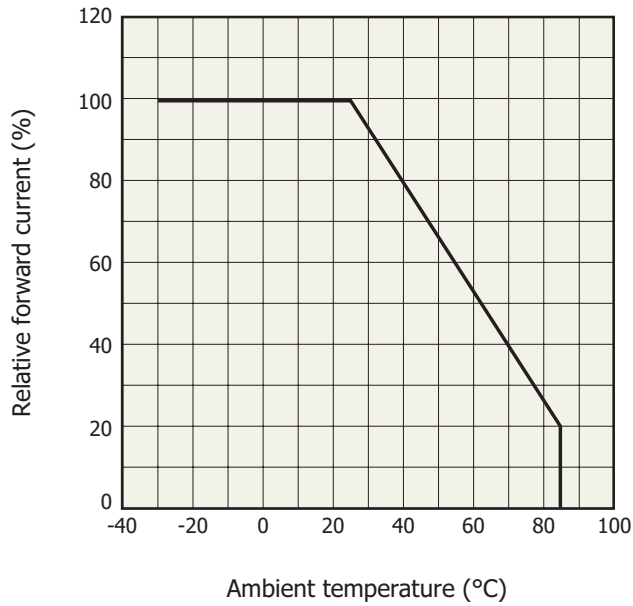

Allowable forward current vs. duty ratio

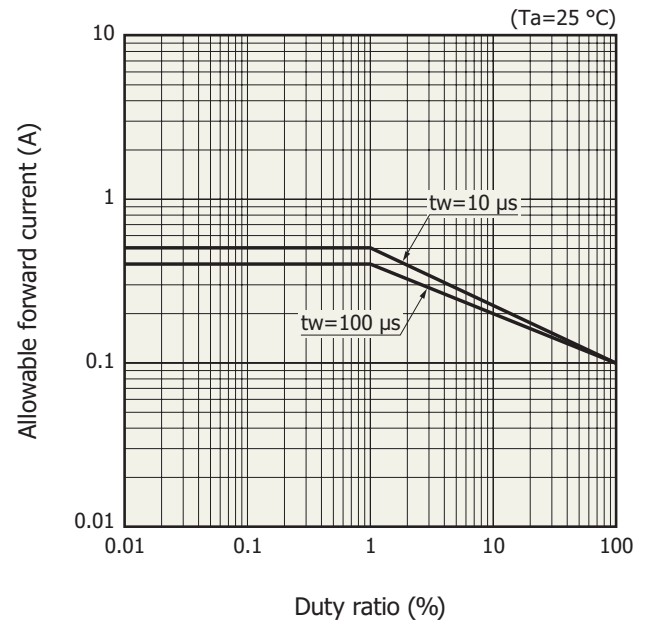


L15893-0330ML, L15894-0390ML, L15895-0430ML:
operating temperature = -20 to +60 °C

KLEDB0417EB

KLEDB0418EA


Dimensional outlines (unit: mm)

L15893-0330C, L15894-0390C, L15895-0430C

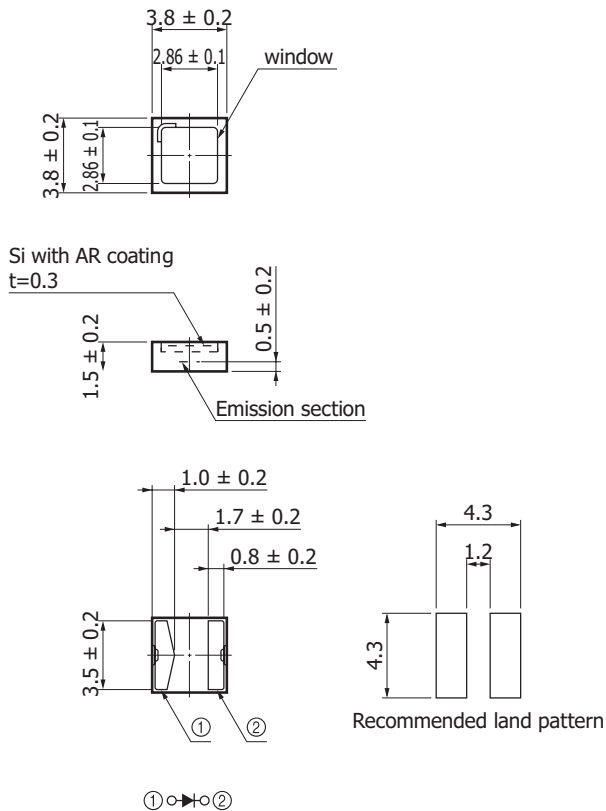


KLEDA0105EC

L15893-0330M, L15894-0390M, L15895-0430M

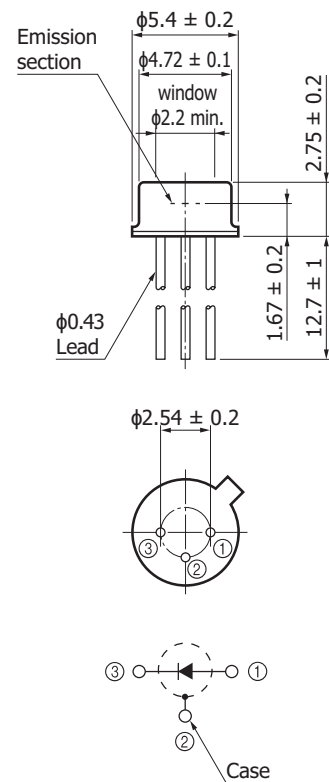

KLEDA0101ED

L15893-0330ML, L15894-0390ML, L15895-0430ML

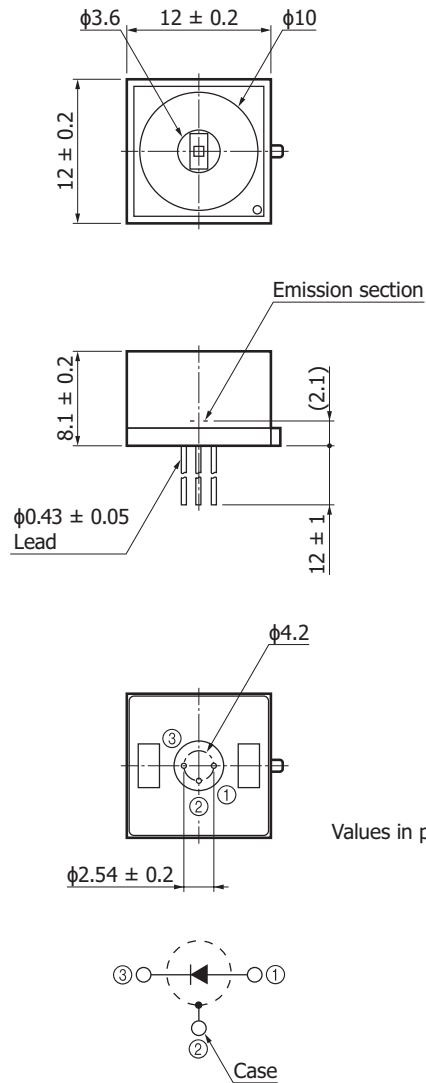

KLEDA0112EA


Standard packing specifications

L15893-0330C, L15894-0390C, L15895-0430C

Reel (conforms to JEITA ET-7200)

Outer diameter	Hub diameter	Tape width	Material	Electrostatic characteristics
φ180 mm	φ60 mm	12 mm	PS	Conductive

Embossed tape (unit: mm, material: PS, conductive)

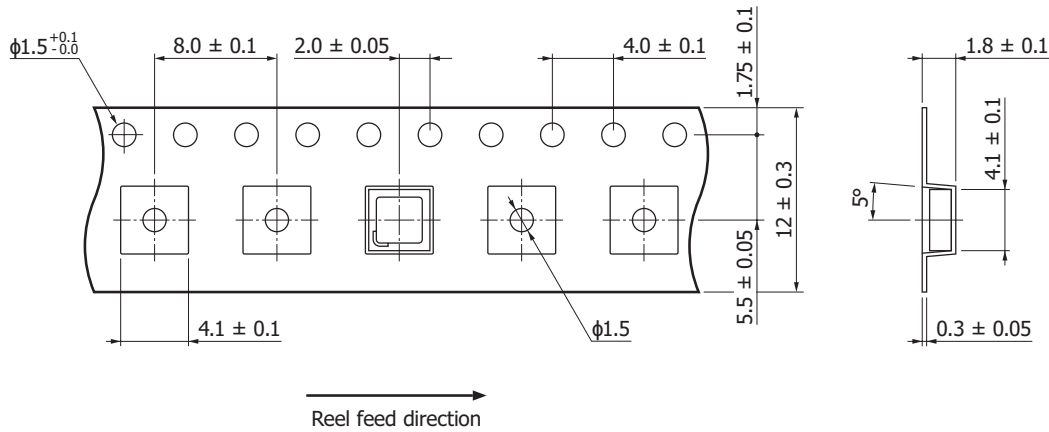

KL.EDC0060EA

Packing quantity


500 pcs/reel

Packing state

Reel and desiccant in moisture-proof packaging (vacuum-sealed)

Recommended soldering conditions

L15893-0330C, L15894-0390C, L15895-0430C

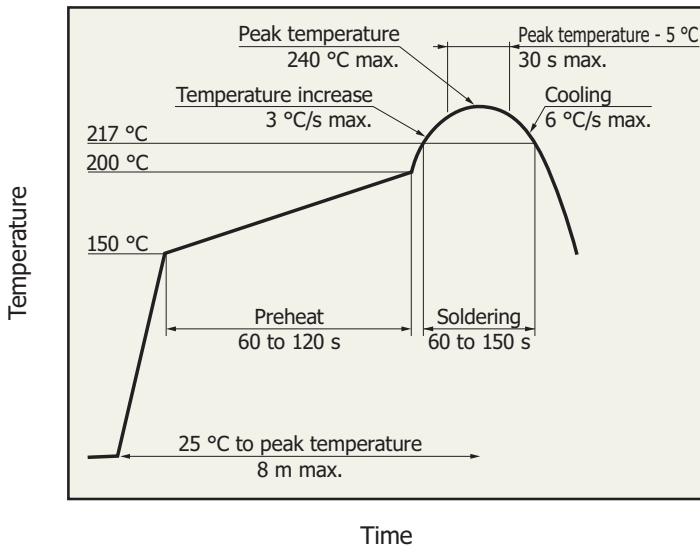

- After unpacking, keep it in an environment at 5 to 30 °C and a humidity of 60% or less, and perform soldering within 168 hours.
- The effect that the product receives during reflow soldering varies depending on the circuit board and reflow oven that are used. When you set reflow soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

KSPD80418EA

L15893-0330M, L15894-0390M, L15895-0430M

Solder temperature: 260 °C (5 s or less, once)
Solder the leads at a point at least 2 mm away from the package body.


L15893-0330ML, L15894-0390ML, L15895-0430ML

Solder temperature: 230 °C (5 s or less, once)
Solder the leads at a point at least 2 mm away from the package body.

Note: When you set soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

Related products

InAsSb photovoltaic detectors with band-pass filter P13243 series

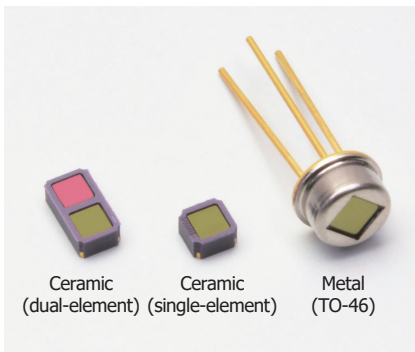

For detecting wavelengths of 3.3 μm, 3.9 μm, or 4.26 μm, we also offer the P13243 series InAsSb photovoltaic detectors with band-pass filter.

Type no.	Package
P13243-015CF/-016CF	Ceramic (dual-element)
P13243-033CF/-039CF/-043CF	Ceramic (single-element)
P13243-033MF/-039MF/-043MF	Metal (TO-46)

Mid infrared LED evaluation kit M16615



Note: LED sold separately

This is a driver for mid infrared LED (L15893-0330M, L15894-0390M, L15895-0430M). The LED can be pulse-driven simply by connecting the power supply (+15 V). Contact us for detailed information.

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Safety consideration
- Metal, ceramic, plastic package products
- Compound opto-semiconductors (photosensors, light emitters)

■ Technical information

- LED / Technical note

Information described in this material is current as of March 2022.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH.: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de

France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01 E-mail: info@hamamatsu.se

Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6, 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it

China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201 Tower B, Jianning Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 8F-3, No.158, Section 2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw